

Kyocera® F-800 Developer Unit



Oasis Imaging Products, Inc. Technical Support: (888) 627-6555

Reference Information:

OEM PN: DV-10
OEM Yield: 20,000 at 5 % coverage

Recommended Tools:

Philips head screwdriver

Printer Compatibility:

Kyocera® F-800, F-800A
F-800T, F-820, F-850

Instructions:

1. Remove the six screws on top of unit (Fig. 1)
2. Gently lift and remove top section of unit.
3. Thoroughly vacuum out remainder of old developer (Fig. 2).
4. Clean and inspect mag roller.
5. Pour one 250 g. bottle of developer into the empty cavity (Fig. 3).
6. Replace top cover and reinstall six screws.

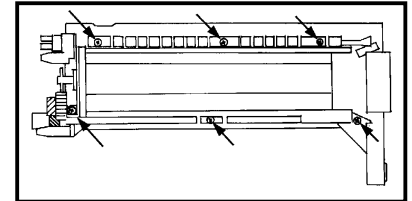


Figure 1

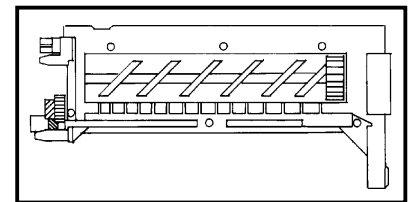


Figure 2

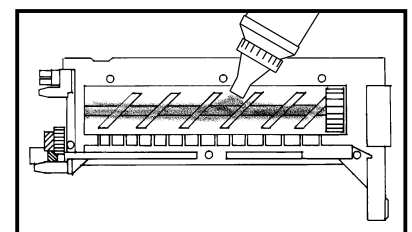


Figure 3